



## AMBERLITE™ IRC86

Industrial Grade Weak Acid Exchanger

### Introduction

AMBERLITE IRC86 resin is a gel type high capacity weak acid cation exchange resin containing carboxylic acid groups. The principal application of this resin is dealkalization of industrial waters. AMBERLITE IRC86 resin, in the hydrogen cycle, removes hardness associated with alkalinity. When used in combination with a strong acid cation exchanger in demineralizer systems, it reduces acid regenerant consumption. Due to its high swelling, it is not recommended to use AMBERLITE IRC86 in applications where the resin is fully converted from H<sup>+</sup> to Na<sup>+</sup> form.

### Properties

Physical form	Clear amber spherical beads
Matrix	Gel polyacrylic copolymer
Functional group	Carboxylic acid
Ionic form as shipped	H <sup>+</sup>
Total exchange capacity	≥ 4.10 eq/L (H <sup>+</sup> form)
Moisture holding capacity	47 to 53 % (H <sup>+</sup> form)
Shipping weight	790 g/L
Particle size	
Uniformity coefficient	≤ 1.80
Harmonic mean size	0.580 to 0.780 mm < 0.300 mm 2.0 % max
Reversible swelling (total conversion)	H <sup>+</sup> → Na <sup>+</sup> ≤ 100 % H <sup>+</sup> → Ca <sup>++</sup> ≤ 15 % H <sup>+</sup> → Mg <sup>++</sup> ≤ 50 %

### Suggested Operating Conditions

Maximum operating temperature	100°C
Minimum bed depth	700 mm
Service flow rate	5 to 70 BV*/h
Regeneration	
Regenerant	HCl      H <sub>2</sub> SO <sub>4</sub>
Level	104 to 110 % of operating capacity
Concentration (%)	2 to 5      0.5 to 0.7
Minimum contact time	30 minutes
Slow rinse	2 BV at regeneration flow rate
Fast rinse	2 to 4 BV at service flow rate

### Performance

#### Operating capacity

The operating capacity of AMBERLITE IRC86 resin is a function of analysis, temperature and service flow rate of water. Data providing information to calculate the capacity are given in the engineering data sheet (EDS 0235 A).

## Regeneration

AMBERLITE IRC86 resin is readily regenerated with little over stoichiometric amounts of strong acids. If sulfuric acid is used, care must be taken to apply a low concentration of H<sub>2</sub>SO<sub>4</sub> (• 0.7 %) in order to avoid calcium sulfate precipitation.

## Limits of use

AMBERLITE IRC86 resin is suitable for industrial uses. For all other specific applications such as pharmaceutical, food processing or potable water applications, it is recommended that all potential users seek advice from Rohm and Haas in order to determine the best resin choice and optimum operating conditions.

## Hydraulic Characteristics

Figure 1 shows the bed expansion of AMBERLITE IRC86 resin as a function of backwash flow rate and water temperature.

Figure 2 shows the pressure drop data for AMBERLITE IRC86 resin, as a function of service flow rate and water temperature. Pressure drop data are valid at the start of the service run with clear water and a correctly classified bed. The hydraulic curves are for H<sup>+</sup> form resin.

Figure 1: Bed Expansion


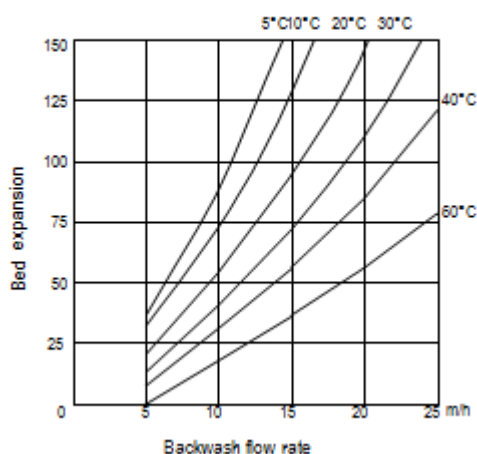


Figure 2: Pressure Drop

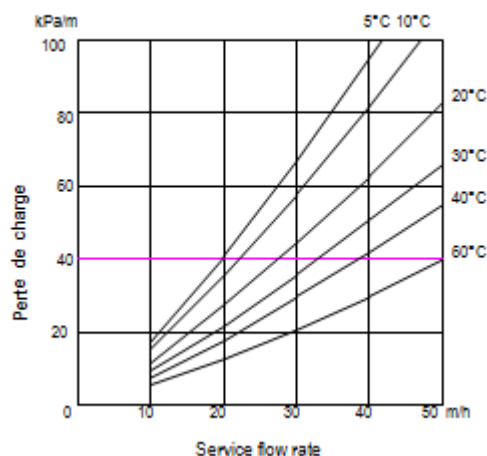

### For more information about DOW™ resins, call the Dow Water & Process Solutions business:

North America: 1-800-447-4369  
Latin America: (+55) 11-5188-9222  
Europe: +800-3-694-6367  
Italy: +800-783-825  
South Africa: +0800 99 5078  
Pacific: +8007776 7776  
China: +400 889-0789

<http://www.dowwaterandprocess.com>

Notice: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

